


HS-7115TH General Specification.



Control System	PWM		-
Position Sensor Type	Contact Analog Potentiometer		-
Motor Type	Cored Metal Brush		At the Max voltage, it is recommended to be used only for a short time duration.
Operating Voltage Range	3.5 ~ 8.4V		
Voltage	-	6.0V	7.4V
No Load Speed	-	0.12sec/60°	0.10sec/60°
Stall Torque	-	3.2kgf-cm (44.4 oz-in)	3.9kgf-cm (54.2 oz-in)
Peak Efficiency Torque	-	0.6kgf-cm (8.3 oz-in)	0.8kgf-cm (11.1 oz-in)
Standing Current	-	10mA	10mA
No Load Running Current	-	110mA	130mA
Stall Current	-	1,250mA	1,500mA
Deadband	-	1μs	1μs
Operating Travel	Default: ±60°, Programmable: Max 175° / Pulse Width: 900~2100μs(Center:1500μs)		Based on resolution normal mode
Continuous Rotation	n/a		-
Operating Temperature Range	-20°C ~ +60°C (-4°F ~ +140°F)		-
Storage Temperature Range	-30°C ~ +80°C (-22°F ~ +176°F)		-
Connector Wire Length	300mm (11.81inch)		 <ul style="list-style-type: none"> 1. SIGNAL 2. VCC 3. GND
Connector Wire Gauge	24AWG		
Dimensions	26.0mm x 8.0mm x 38.0mm (1.024inch x 0.315inch x 1.496inch)		General Tolerance ±0.1mm
Weight	20.0g (0.705oz)		Excluding the weight of Horn
Bearing Type	2 Ball Bearing		-
Case Material	Engineering Plastic		-
Gear Material	1 Metal-Plastic & 5 Titanium Alloy Gears		-
Gear Train Backlash	Max 0.5°		-
Horn Gear Spline	15T(Ø4)		-
IP-Rating	IP4X		-
Servo Amplifier Type	8bit Programmable Digital		-

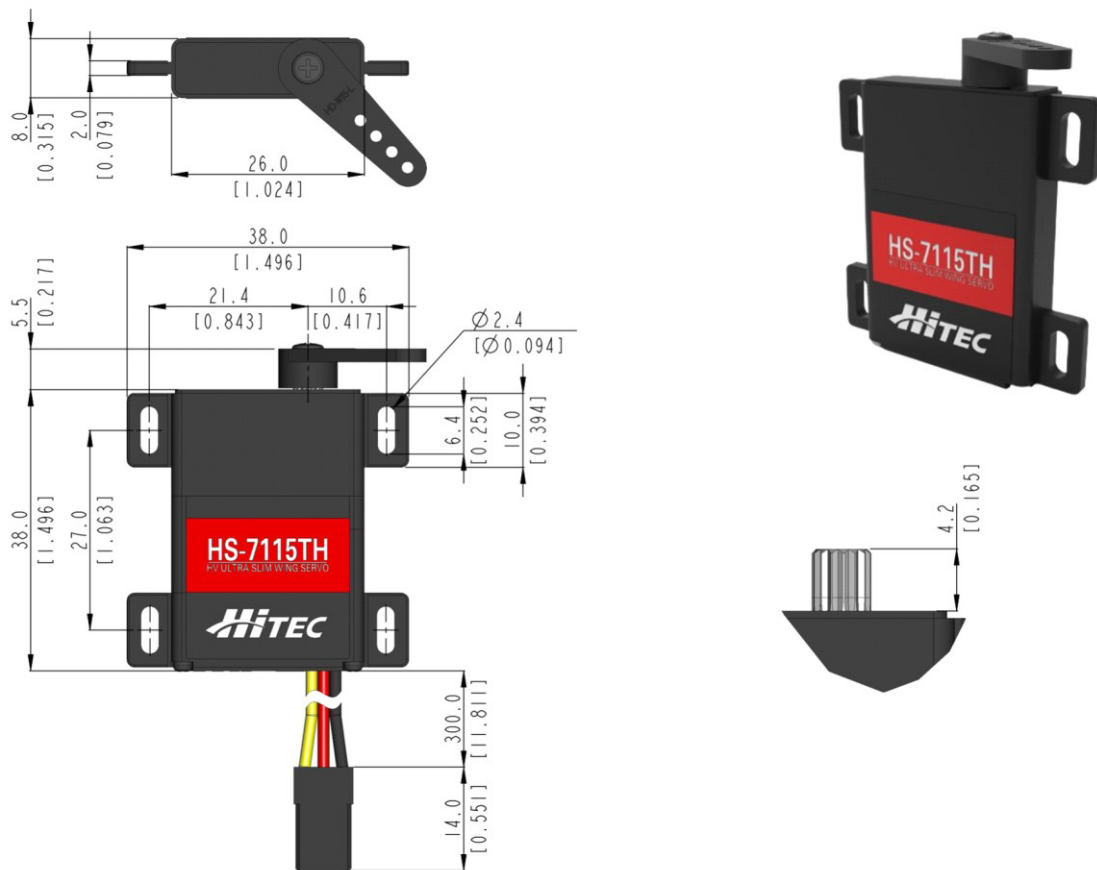

1:1 scale (Unit : mm[inch])

- This product should not be used directly on the human body for medical purposes.
- All specifications are subject to change without notice.



9001:2015
14001:2015
CERTIFIED



HitecCS.com